


# 150W Single Output with PFC Function

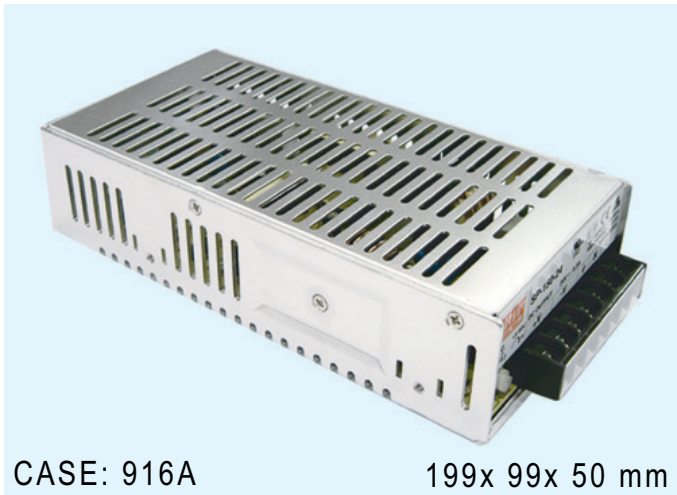

- Universal AC input / Full range
- PF>0.98@115VAC; >0.93@230VAC
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Built-in constant current limiting circuit
- Remote ON/OFF control (option)
- Approvals: UL / CUL / TUV / CB / CE / S-MARK
- Cooling by free air convection
- 3 years warranty

CASE: 916A

199x 99x 50 mm

AC input voltage range ..... 85~264VAC; 120~370VDC  
 DC adjustment range..... -5~+10% rated output voltage  
 Over load protection ..... 105%~150% constant current, auto-recovery  
 Over voltage protection..... 110%~135% rated output voltage  
 Withstand voltage ..... I/P-O/P:3KVAC, I/P-FG:1.5KVAC, 1minute  
 Working temperature ..... -10~50°C(refer to output derating curve)  
 Safety standards..... UL60950-1, TUV EN60950-1, J60950 approved  
 EMC standards ..... EN55022 class B, EN61000-3-2,3  
 EN61000-4-2,3,4,5,6,8,11, ENV50204  
 Connection ..... 7P/ 9.5mm pitch terminal block with cover  
 Packing ..... 0.76kg ; 20pcs / 16.4kg / 1.28CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.
10391	SP-150-3.3	3.3V, 0~30.0A	±2%	100mV	67%
10392	SP-150-5	5V, 0~30.0A	±2%	100mV	75%
10393	SP-150-7.5	7.5V, 0~20.0A	±2%	100mV	79%
10394	SP-150-12	12V, 0~12.5A	±2%	100mV	80%
10395	SP-150-13.5	13.5V, 0~11.2A	±2%	100mV	80%
10396	SP-150-15	15V, 0~10.0A	±2%	100mV	81%
10397	SP-150-24	24V, 0~6.30A	±1%	150mV	83%
10398	SP-150-27	27V, 0~5.60A	±1%	150mV	84%
10399	SP-150-48	48V, 0~3.20A	±1%	250mV	84%