


40W Triple Output Switching Power Supply

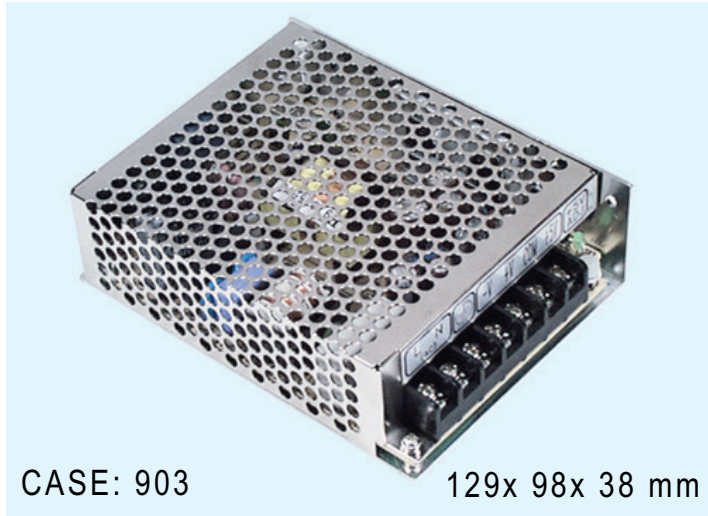

CASE: 903

129x 98x 38 mm

- Universal AC input / Full range
- Protections: Short circuit / Over load / Over voltage
- Fixed switching frequency at 40KHz
- Approvals: CSA / CE / NRTL
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

AC input voltage range..... 85~264VAC; 120~370VDC
 DC adjustment range CH1: -5~+10% rated output voltage
 Over load protection..... 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Setup, rise, hold up time.... 800ms, 50ms, 60ms at full load and 230VAC
 Withstand voltage I/P-O/P:3KVAC, I/P-FG:1.5KVAC, 1minute
 Working temperature 0~50°C@100%, -10°C@80%, 60°C@60% load
 Safety standards..... CSA60950-1 approved
 EMC standards..... EN55022 class B, EN61000-3-2,3
 EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 7P/ 9.5mm pitch terminal block with cover
 Packing 0.44kg ; 30pcs / 14.7kg / 0.86CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.	Max.
10271	T-40A	5V, 0.6~5.0A	±2%	100mV	72%	42W
		12V, 0.2~3.0A	±6%	120mV		
		-5V, 0.1~1.0A	±8%	100mV		
10272	T-40B	5V, 0.6~5.0A	±2%	100mV	72%	45W
		12V, 0.2~3.0A	±6%	120mV		
		-12V, 0.1~1.0A	±8%	120mV		
10273	T-40C	5V, 0.6~5.0A	±2%	100mV	72%	45W
		15V, 0.2~2.0A	±6%	120mV		
		-15V, 0.1~1.0A	±6%	120mV		