


30W Single Output Class II DIN Rail Power

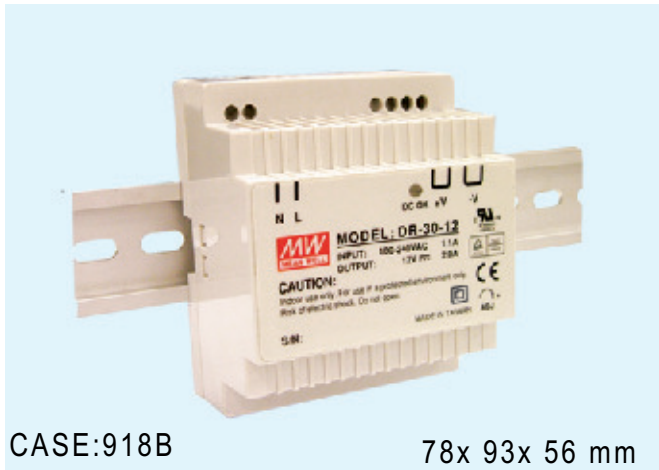

CASE:918B

78x 93x 56 mm

- Universal AC input / Full range
- Installed on DIN rail TS35 / 7.5 or 15
- Protections: Short circuit / Overload / Over voltage
- Isolation Class II
- Approvals: UL / CUL / TUV / CB / CE
- LED indicator for power on
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty

| | |
|---------------------------|--|
| AC input voltage range | 85~264VAC; 120~370VDC |
| AC inrush current | Cold start, 15A at 115VAC, 30A at 230VAC |
| DC adjustment range | ±10% rated output voltage |
| Overload protection | 105%~160% constant current limiting, auto-recovery |
| Over voltage protection | 115%~135% rated output voltage |
| Setup, rise, hold up time | 100ms, 30ms, 100ms at full load and 230VAC |
| Withstand voltage | I/P-O/P:3KVAC |
| Working temperature | -20~50°C@100%, 60°C@80% load |
| Safety standards | UL60950-1, TUV EN60950-1 approved |
| EMC standards | EN55022 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61204-3 |
| Connection | I/P: 2 poles, O/P: 4 poles screw DIN terminal |
| Packing | 0.27kg ; 48pcs / 14.0kg / 1.02CUFT |

| Stock No. | Model No. | Output | Tol. | R&N | Effi. |
|-----------|-----------|-------------|------|-------|-------|
| 11241 | DR-30-5 | 5V, 0~3.0A | ±2% | 80mV | 74% |
| 11242 | DR-30-12 | 12V, 0~2.0A | ±1% | 120mV | 81% |
| 11243 | DR-30-15 | 15V, 0~2.0A | ±1% | 120mV | 82% |
| 11244 | DR-30-24 | 24V, 0~1.5A | ±1% | 150mV | 83% |